



Isometric view



REFERENCE:

- PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE.
 2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE.
 3. APPLICABLE HOLE SIZE:
 - A. M6 X1.0

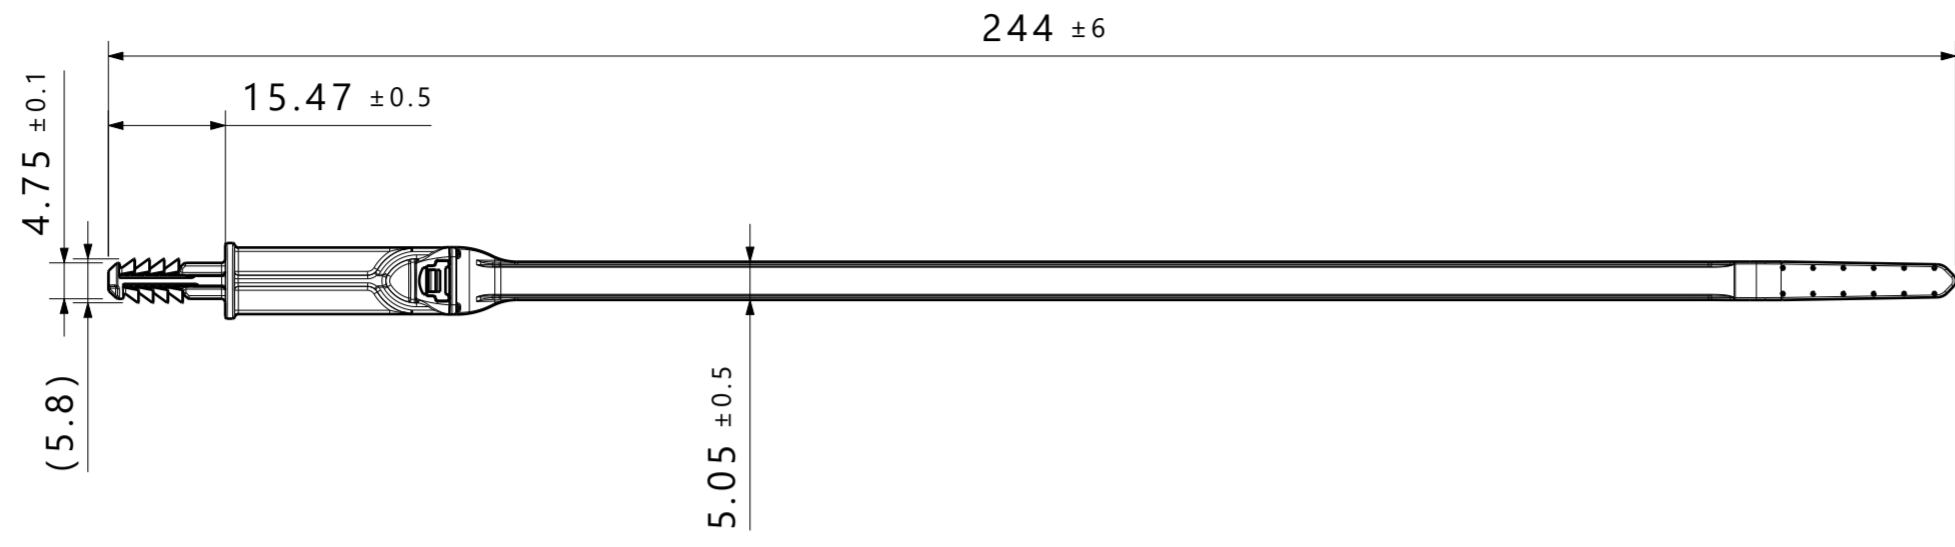

4. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
5. HAND ASSEMBLED BUNDLE RANGE: 2.0mm TO 50.0mm
APPLICATION TOOL BUNDLE RANGE: 2.0mm TO 45.0mm
6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
7. MAX ALLOWABLE FLASH TO BE: 0.25mm
8. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

Global Part Description	Material	Color
T50ROSFTM625SO-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record		The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title	Scale	
Drawing	State	Part	016362			All drawing revisions are stored in CAD PDM database	Camposagrado		2020/07/31	25mm stand off cable tie with M6
02.1	Design Release	-			Approved		Date (YYYY/MM/DD)	19-1380	Global Project Number	
Changed	Date (YYYY/MM/DD)			Fish	2020/07/31		Drawing-No		Format	
Duncan	2021/02/25						19-1380-001-CSU	A2		
Approved	Date (YYYY/MM/DD)					Units		Sheet	1 / 1	
Fish	2021/02/26					mm				

HellermannTyton
www.HellermannTyton.com

19-1380-001-CSU