

TabTags™

Easier to peel
for faster
installations.

MADE FOR REAL 


TabTags Instructions:




1. To peel off label, bend liner to expose tab.



2. Press just the tab onto the wire and align label as needed.

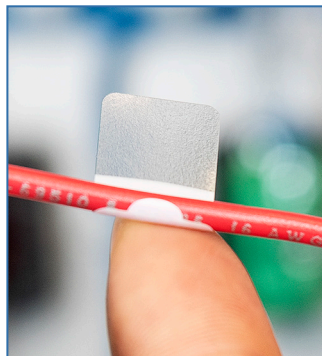

3. Wrap label and clear tail around wire to laminate the printed portion.

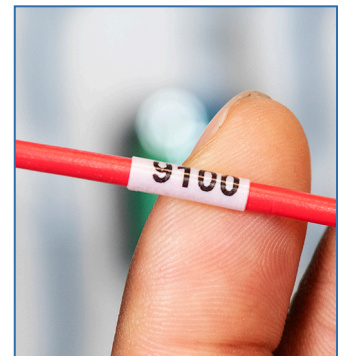

4. Finished application.

Identification

Labels


Thermal Transfer Labels

TabTags™ Self-Laminating Labels


HellermannTyton TabTag thermal transfer self-laminating labels are a conformable vinyl film with a white printable surface followed by a clear tail that laminates the printed text when applied to a wire or cable. Handling the label by the tab helps keep fingers off the clear overlay, ensuring years of performance. The labels are UL recognized for indoor use with an aggressive acrylic adhesive that enables the label to bond to large and small diameter wires.

Features and Benefits

- Convenient tab is easier to remove from the liner, speeding labeling operations.
- Tab acts as a guide during positioning or repositioning to ensure a straight wrap and a high-quality appearance.
- Tab helps prevent label slippage when applied to cable insulation, reducing labor.
- In tests, TabTags increased the average number of wraps per hour by 12 percent, saving time and increasing output.

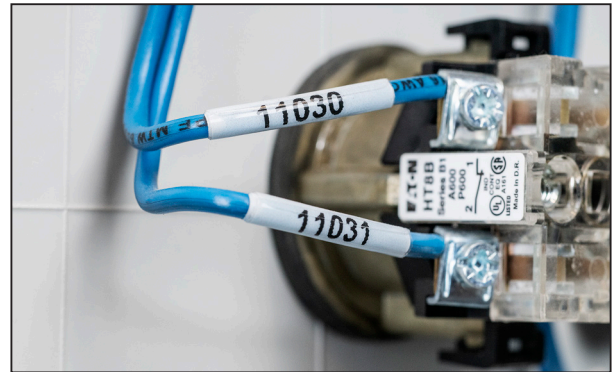

MATERIAL	Type 100B, Vinyl, white transparent, self-laminating (100B)
Color	White (WH)



PART NO.	TYPE	Label Width (W) in. (mm)	Printable Area Height (H) in. (mm)	Label Height (H2) in. (mm)	Vertical Repeat in. (mm)	Horizontal Repeat in. (mm)	Liner Width in. (mm)	Color	Labels per Row	Pkg. Qty.
596-12200*	TAG2T5ES	0.50 (12.7)	0.50 (12.7)	1.56 (39.60)	1.74 (44.19)	0.66 (16.76)	3.35 (85.09)	White	5	10000
596-12201*	TAG22T3ES	1.00 (25.4)	0.50 (12.7)	1.56 (39.60)	1.74 (44.19)	1.07 (27.17)	3.35 (85.09)	White	3	5000
596-12202*	TAG51T3ES	1.00 (25.4)	0.37 (9.4)	0.82 (17.00)	1.0 (25.40)	1.07 (27.17)	3.35 (85.09)	White	3	10000
596-12203*	TAG26T6ES	0.50 (12.7)	0.37 (9.4)	0.82 (17.00)	1.0 (25.40)	0.62 (15.74)	4.00 (101.60)	White	6	10000

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.



* Please note - not all products listed on this page may have this approval. Please see www.HellermannTyton.com for the latest approvals.

HellermannTyton North American Corporate Headquarters

7930 N. Faulkner Rd, PO Box 245017
 Milwaukee, WI 53224-9517
 Phone: (414) 355-1130, (800) 537-1512
 Fax: (414) 355-7341, (800) 848-9866
 email: corp@htamericas.com
www.hellermann.tyton.com

IATF 16949, AS9100, ISO 9001 and ISO14001 certified

HellermannTyton Canada

Unit #4, 205 Industrial Parkway North
 Aurora, Ontario L4G 4C4 Canada
 Phone: (800) 661-2461
 Fax: (800) 390-3904
 email: sales@hellermanntyton.ca

HellermannTyton Mexico

Anillo Periferico Sur 7980 Edificio 6A
 Parque Industrial Tecnologico II
 Santa Maria Tequepepan
 Tlaquepaque, Jalisco, Mexico 45601
 Phone: 011-52-33-3-133-9880
 Fax: 011-52-33-3-133-9861
 email: info-mx@hellermanntyton.com

ISO 9001 certified

Warranty Policy – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.